


**Standardlängen Spiroval  
 Longueurs standard spiroval**

H = Kanalhöhe in mm / Hauteur en mm  
 B = Kanalbreite in mm / Largeur en mm

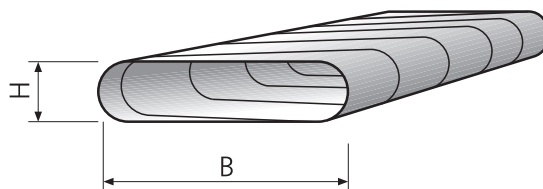

Mit Mausklick gelangen Sie zum [Blätterkatalog]

max. 3.0 m

bis 2.0 m	H	80	100	125	150	200	250	300	350	400	450	500	
	B	240	260	240	270	520	570	615	680	720	770	830	
		270	300	280	310	600	650	710	750	800	860	960	
		310	345	325	355	675	740	775	830	890	1010	1135	
		350	385	370	385	770	805	855	920	1040	1160	1295	
		400	415	400	475	830	880	945	1065	1190	1325	1455	
		430	505	485	550	910	975	1100	1220	1350	1480	1610	
	max. 3.0 m				625	1005	1120	1250	1375	1510	1640	1770	
					700	1150	1275	1410	1535	1670	1800		
					800	1305	1430	1565	1700	1825			
					860		1600	1725	1860				
					940		1750	1880					
				1040		1905							