


Rohrdurchmesser zur Herstellung von Spiroval / Materialstärken
Diamètres de tube pour fabrication / Epaisseurs

H = Kanalhöhe in mm / Hauteur en mm
 B = Kanalbreite in mm / Largeur en mm

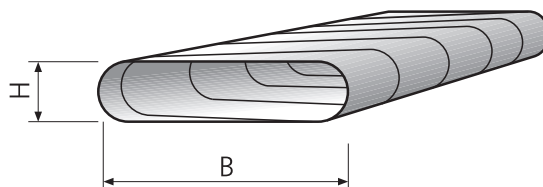

Mit Mausklick gelangen Sie zum [Blechkatalog]

| H | 80 | 100 | 125 | 150 | 200 | 250 | 300 | 350 | 400 | 450 | 500 |
|---|----------|----------|----------|----------|----------|-----------|-----------|-----------|-----------|-----------|-----------|
| B | 240 | 260 | 240 | 270 | 520 | 570 | 615 | 680 | 720 | 770 | 830 |
| | 180/0.62 | 200/0.62 | 200/0.62 | 224/0.62 | 400/0.62 | 450/0.62 | 500/0.62 | 560/0.62 | 600/0.62 | 650/0.75 | 710/0.75 |
| | 270 | 300 | 280 | 310 | 600 | 650 | 710 | 750 | 800 | 860 | 960 |
| | 200/0.62 | 224/0.62 | 224/0.62 | 250/0.62 | 450/0.62 | 500/0.62 | 560/0.62 | 600/0.62 | 650/0.75 | 710/0.75 | 800/0.75 |
| | 310 | 345 | 325 | 355 | 675 | 740 | 775 | 830 | 890 | 1010 | 1135 |
| | 224/0.62 | 250/0.62 | 250/0.62 | 280/0.62 | 500/0.62 | 560/0.62 | 600/0.62 | 650/0.75 | 710/0.75 | 800/0.75 | 900/0.75 |
| | 350 | 385 | 370 | 385 | 770 | 805 | 855 | 920 | 1040 | 1160 | 1295 |
| | 250/0.62 | 280/0.62 | 280/0.62 | 300/0.62 | 560/0.62 | 600/0.62 | 650/0.75 | 710/0.75 | 800/0.75 | 900/0.75 | 1000/0.75 |
| | 400 | 415 | 400 | 475 | 830 | 880 | 945 | 1065 | 1190 | 1325 | 1455 |
| | 280/0.62 | 300/0.62 | 300/0.62 | 355/0.62 | 600/0.62 | 650/0.75 | 710/0.75 | 800/0.75 | 900/0.75 | 1000/0.75 | 1100/1.00 |
| | 430 | 505 | 485 | 550 | 910 | 975 | 1100 | 1220 | 1350 | 1480 | 1610 |
| | 300/0.62 | 355/0.62 | 355/0.62 | 400/0.62 | 650/0.75 | 710/0.75 | 800/0.75 | 900/0.75 | 1000/0.75 | 1100/1.00 | 1200/1.00 |
| | | | | 625 | 1005 | 1120 | 1250 | 1375 | 1510 | 1640 | 1770 |
| | | | | 450/0.62 | 710/0.75 | 800/0.75 | 900/0.75 | 1000/0.75 | 1100/1.00 | 1200/1.00 | 1300/1.00 |
| | | | | 700 | 1150 | 1275 | 1410 | 1535 | 1670 | 1800 | |
| | | | | 500/0.62 | 800/0.75 | 900/0.75 | 1000/0.75 | 1100/1.00 | 1200/1.00 | 1300/1.00 | |
| | | | | 800 | 1305 | 1430 | 1565 | 1700 | 1825 | | |
| | | | | 560/0.62 | 900/0.75 | 1000/0.75 | 1100/1.00 | 1200/1.00 | 1300/1.00 | | |
| | | | | 860 | | 1600 | 1725 | 1860 | | | |
| | | | | 600/0.62 | | 1100/1.00 | 1200/1.00 | 1300/1.00 | | | |
| | | | | 940 | | 1750 | 1880 | | | | |
| | | | | 650/0.75 | | 1200/1.00 | 1300/1.00 | | | | |
| | | | | 1040 | | 1905 | | | | | |
| | | | | 710/0.75 | | 1300/1.00 | | | | | |

Beispiel: Spiroval H 200 / B 520 = Ø 400 / Materialstärke 0.62 mm
 Exemple: Spiroval H 200 / B 520 = Ø 400 / Epaisseur 0.62 mm

| | |
|---|----------|
| H | 200 |
| B | 520 |
| | 400/0.62 |